


SERIES CS TYPE 01, 31, 32

Wiring Diagram

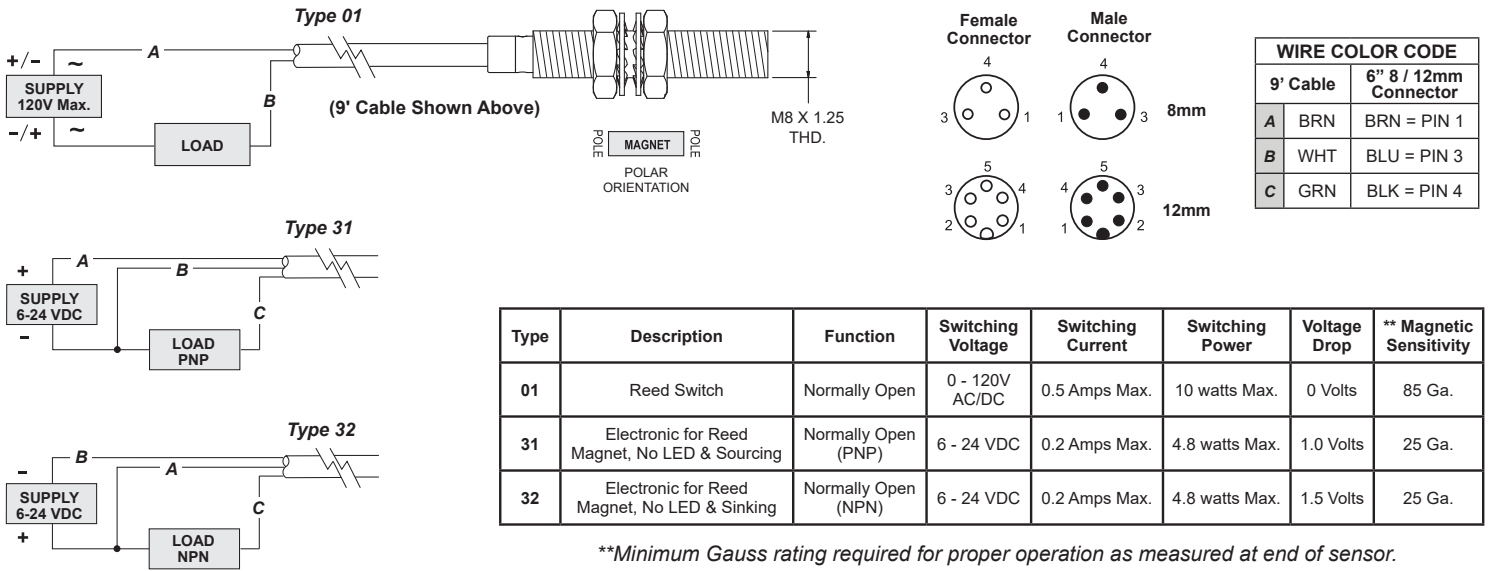

Type	Description	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop	** Magnetic Sensitivity
01	Reed Switch	Normally Open	0 - 120V AC/DC	0.5 Amps Max.	10 watts Max.	0 Volts	85 Ga.
31	Electronic for Reed Magnet, No LED & Sourcing	Normally Open (PNP)	6 - 24 VDC	0.2 Amps Max.	4.8 watts Max.	1.0 Volts	25 Ga.
32	Electronic for Reed Magnet, No LED & Sinking	Normally Open (NPN)	6 - 24 VDC	0.2 Amps Max.	4.8 watts Max.	1.5 Volts	25 Ga.

****Minimum Gauss rating required for proper operation as measured at end of sensor.**


Power Supply Polarity MUST be Observed for Proper Operation (except Type 01).

WARNING: Do not exceed ratings. Permanent damage to sensor may occur.

A56-1667 R.00

SERIES CS TYPE 01, 31, 32

Wiring Diagram

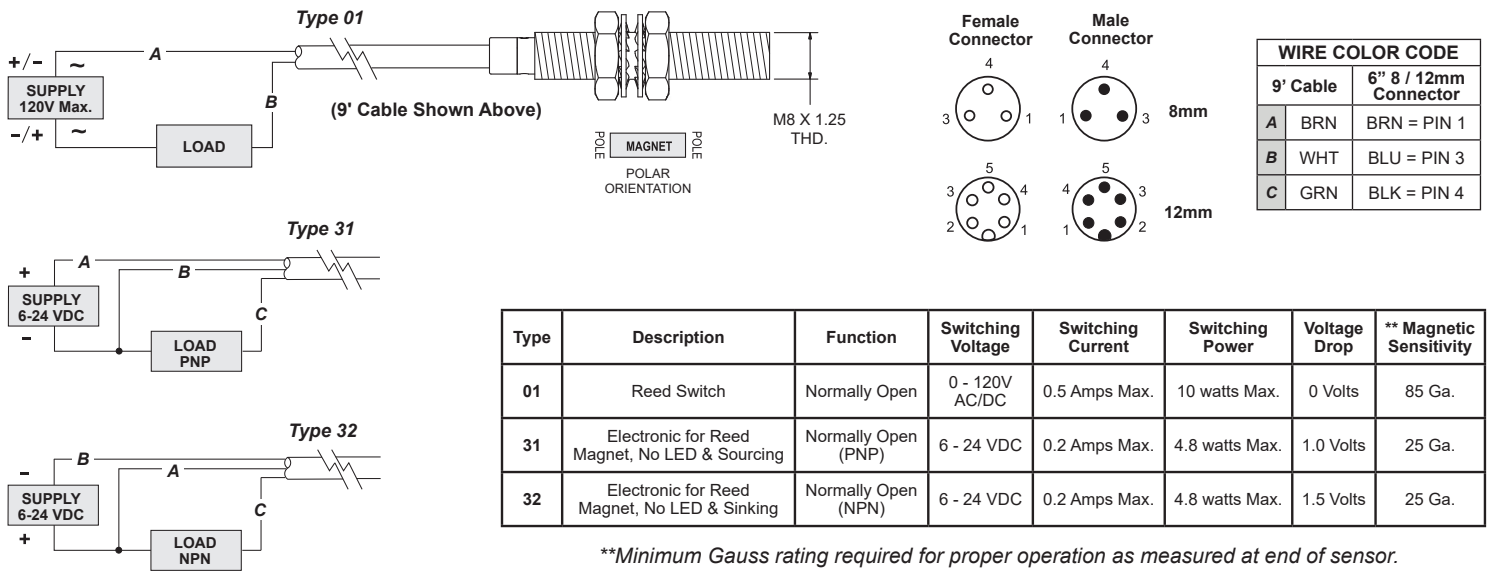

Type	Description	Function	Switching Voltage	Switching Current	Switching Power	Voltage Drop	** Magnetic Sensitivity
01	Reed Switch	Normally Open	0 - 120V AC/DC	0.5 Amps Max.	10 watts Max.	0 Volts	85 Ga.
31	Electronic for Reed Magnet, No LED & Sourcing	Normally Open (PNP)	6 - 24 VDC	0.2 Amps Max.	4.8 watts Max.	1.0 Volts	25 Ga.
32	Electronic for Reed Magnet, No LED & Sinking	Normally Open (NPN)	6 - 24 VDC	0.2 Amps Max.	4.8 watts Max.	1.5 Volts	25 Ga.

****Minimum Gauss rating required for proper operation as measured at end of sensor.**

Power Supply Polarity MUST be Observed for Proper Operation (except Type 01).

WARNING: Do not exceed ratings. Permanent damage to sensor may occur.

A56-1667 R.00