

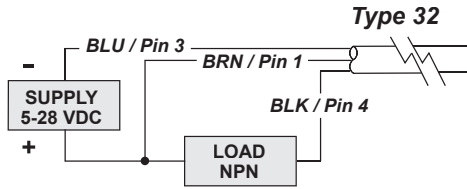
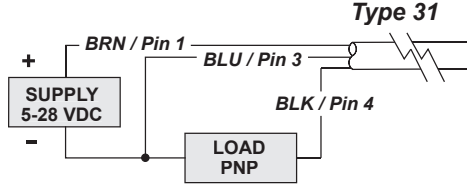
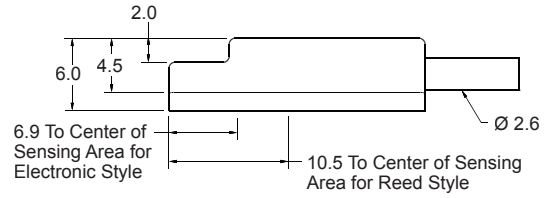



SERIES 9E TYPE 01, 02, 31 & 32

Wiring Diagram

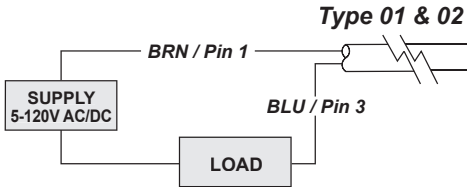






Type Code	Description	Function	Switching Voltage	Switching Current	Switching Power	Switching Speed	Voltage Drop	Magnetic Sensitivity
01	Reed Switch	SPST Normally Open	0 - 120V AC/DC 50/60 Hz	0.25 Amps max.	5 Watts max.	0.4 ms operate 0.1 ms release	0 Volts	85 Ga.
02	Reed Switch for PLC's, LED (current limiting)	SPST Normally Open	5-120V AC/DC 50/60 Hz	0.03 Amps max. 0.001 Amps min.	4 Watts max.	0.4 ms operate 0.1 ms release	3.5 Volts @ 5 mA	85 Ga.
31	Electronic for Reed Magnet, LED & Sourcing	PNP Normally Open	5 - 28 VDC	0.2 Amps max.	4.8 Watts max.	4 µs operate 4 µs release	1.0 Volts max.	25 Ga.
32	Electronic for Reed Magnet, LED & Sinking	NPN Normally Open	5 - 28 VDC	0.2 Amps max.	4.8 Watts max.	4 µs operate 4 µs release	1.0 Volts max.	25 Ga.

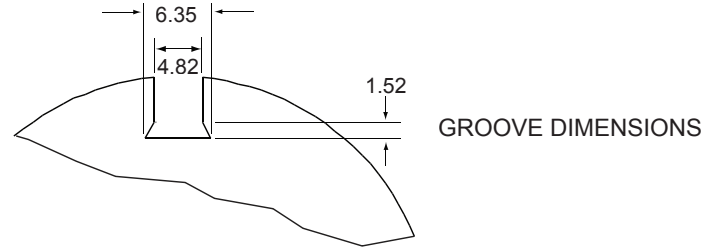


A56-1389 Rev. 01

SERIES 9E TYPE 01, 02, 31 & 32

Wiring Diagram

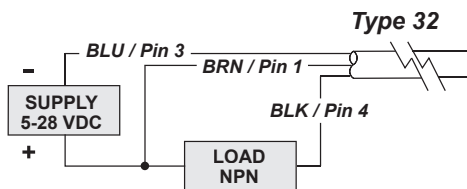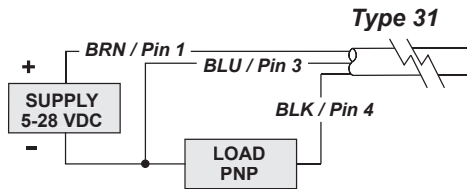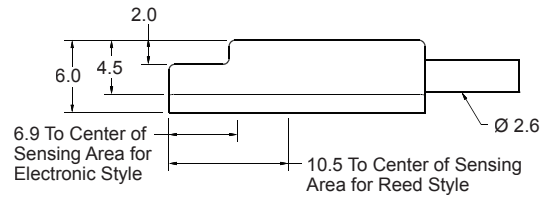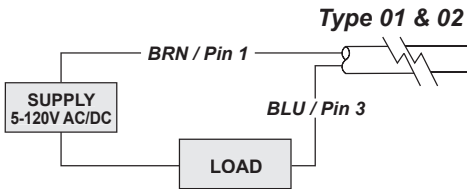

Type Code	Description	Function	Switching Voltage	Switching Current	Switching Power	Switching Speed	Voltage Drop	Magnetic Sensitivity
01	Reed Switch	SPST Normally Open	0 - 120V AC/DC 50/60 Hz	0.25 Amps max.	5 Watts max.	0.4 ms operate 0.1 ms release	0 Volts	85 Ga.
02	Reed Switch for PLC's, LED (current limiting)	SPST Normally Open	5-120V AC/DC 50/60 Hz	0.03 Amps max. 0.001 Amps min.	4 Watts max.	0.4 ms operate 0.1 ms release	3.5 Volts @ 5 mA	85 Ga.
31	Electronic for Reed Magnet, LED & Sourcing	PNP Normally Open	5 - 28 VDC	0.2 Amps max.	4.8 Watts max.	4 µs operate 4 µs release	1.0 Volts max.	25 Ga.
32	Electronic for Reed Magnet, LED & Sinking	NPN Normally Open	5 - 28 VDC	0.2 Amps max.	4.8 Watts max.	4 µs operate 4 µs release	1.0 Volts max.	25 Ga.

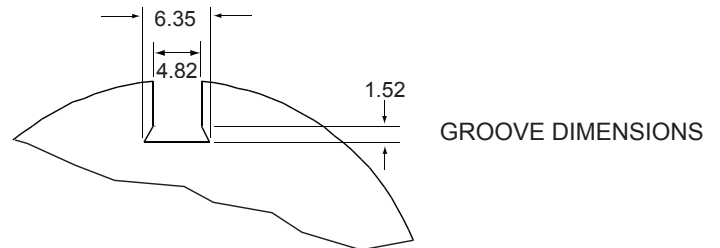

A56-1389 Rev. 01